



Feel the Difference®


Assembly Instructions

Garden Bench with Back (GA-BeB)





Tools Needed: #2 sq. drive bit for power drill or screw driver, $\frac{7}{16}$ " wrench, hammer.

Parts

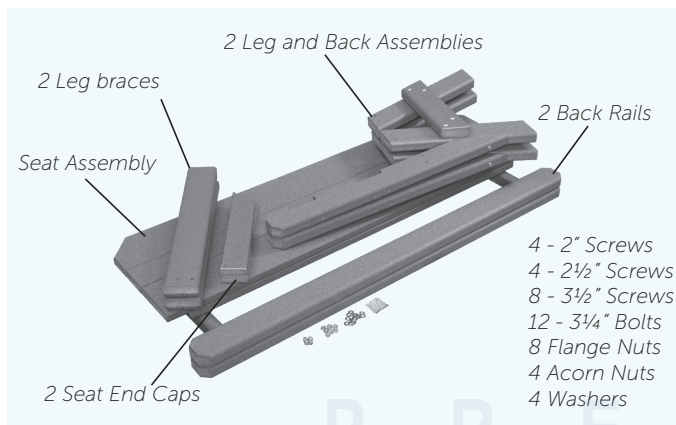



Step 1 — Continued

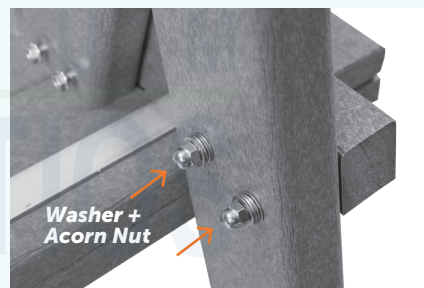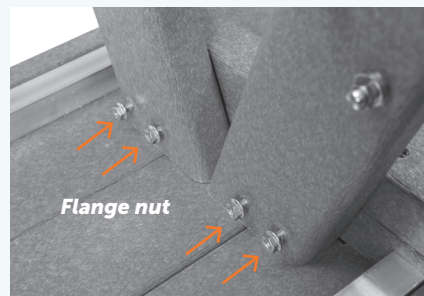

Next, use one flange nut per bolt under the seat. Now, put one washer onto the back bolts and fasten with the Acorn Nuts.

Step 1 — Attach Leg and Back Assembly

2 Leg and Back Assemblies, Seat Assembly, 12 Bolts, 8 Flange nuts, 4 Washers, 4 Acorn Nuts

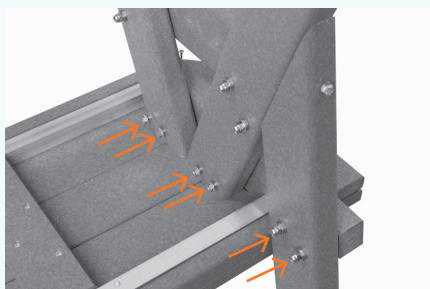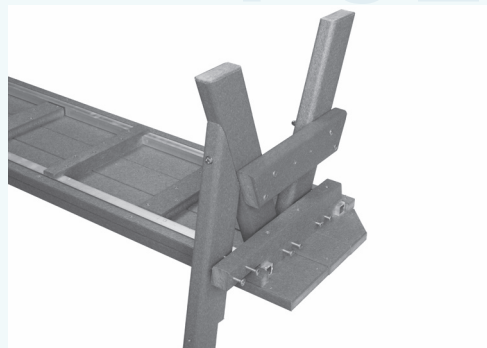

First, cover a table with a soft, clean blanket, and place the seat face-down. Now, place the two leg assemblies upside down on top of the seat and attach using six bolts for each leg.

[View this product online at Premium Poly Patios](#)



Feel the Difference®



Assembly Instructions

Page 2

[View this product online at Premium Poly Patios](#)

Step 2 — Attach Leg Braces



4 - 2½" Screws, 4 - 2" Screws, 2 Leg braces

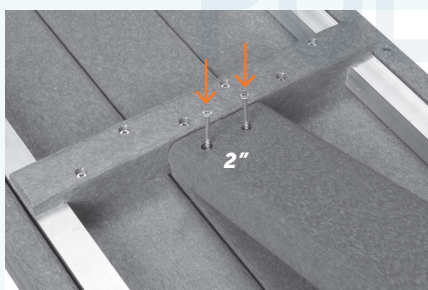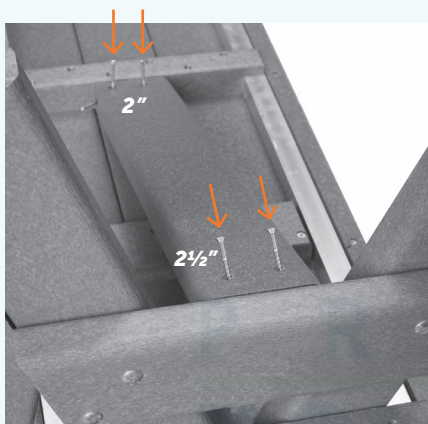

Next attach the two center braces using two 2½" screws on the inside of the leg and two 2" screws on the seat end.

Step 3 — Attach the Back Rails

2 Back Rails, 8 - 3½" Screws

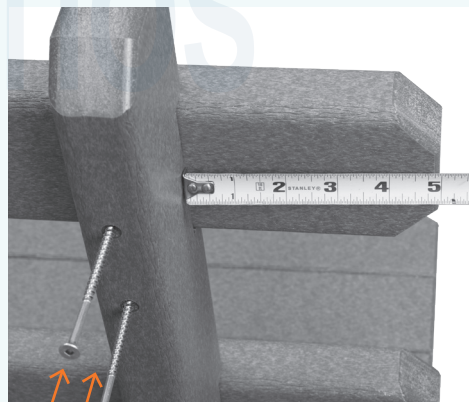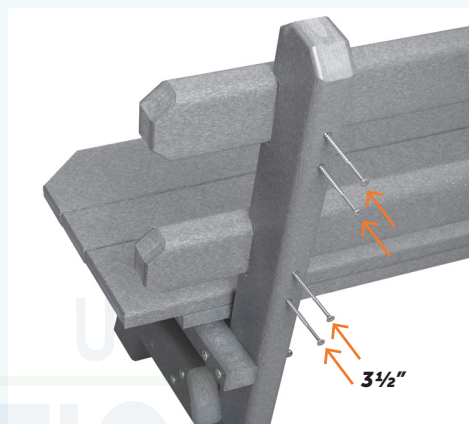

3½"

Finally, set the bench on its feet. Use the 3½" screws to attach the two back rails with the aluminum brace facing down.

Congratulations!
Your **Garden Bench with Back**
is ready to enjoy!

